


AUTOMOTIVE FILMS

EXLB CERAMICS

INFORMATION

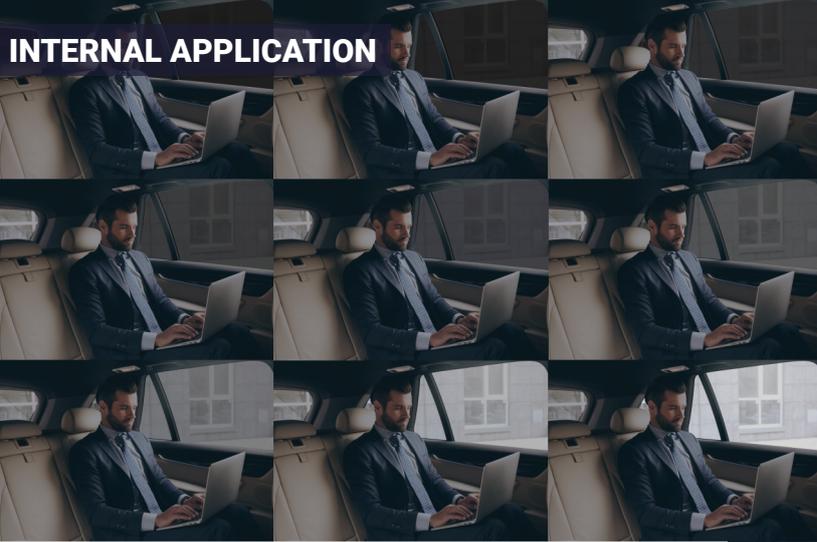

SUPPORT :	PET crystal
ADHESIVE :	Acrylic polymer
PROTECTOR :	Siliconised PET 20 microns
THICKNESS :	70 microns
COLOUR :	Grey-Black
APPLICATION SIDE :	Internal
TRANSMITTED VISIBLE LIGHT :	Varies from 5 % to 83 %
SOLAR ENERGY TRANSMISSION :	Varies from 6 % to 60 %
SOLAR ENERGY FACTOR :	Varies from 7 % to 30 %
SOLAR ENERGY ABSORPTION :	Varies from 20 % to 56 %
INFRARED REJECTION :	Varies from 11,4 % to 70,5 %
GLARE REDUCTION :	Varies from 94 % to 35 %
SCRATCH RESISTANCE :	>2H
UV BLOCKING :	99 %
T° OF APPLICATION :	min, + 5°C
STANDARDS :	EUROCLASSES
FIRE RATING :	B-s1, d0
GUARANTEE :	5 years

DESCRIPTION

Our self-adhesive films are the ideal solution for darkening your vehicle's windows. They recreate the look of a tinted window to perfection, enhancing the vehicle's aesthetics and rejecting the sun's heat. For your comfort, when the outside temperature rises, they reject the sun's energy, keeping the passenger compartment cool and saving energy by reducing the need for air conditioning.



 **SUSTAINABILITY :** 5 years for vertical applications in Central Europe.

 **USE :** For all types of glazing.

 **MAINTENANCE :** After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.

 **STORAGE :** 2 years from delivery. This film should be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet the highest standards, we recommend that you do not mix films from different productions.

Application notes



SCAN ME

Video of the installation



SCAN ME

DIMENSIONS

BY ROLL :



1,52 x 10 m
0,75 x 30 m

METHOD OF APPLICATION

The surface to be bonded must be free from dust, grease or any other contaminant. Some materials, such as polycarbonate, can cause bubbling problems. A compatibility test is therefore recommended. Can be installed on plexiglass and polycarbonate.

PRODUCTION AND STANDARDS

In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.

VARIANTS



EXLB 05



EXLB 10



EXLB 15



EXLB 20



EXLB 25



EXLB 35



EXLB 50



EXLB 70



EXLB 83

 : +33 (0)1 43 99 00 22

 : info@reflectiv.com

 : www.reflectiv.com

 **Showroom :** 36 rue Réaumur 75003 Paris

 **Head office :** P.A. des petits carreaux

2 avenue des Orangers 94380 Bonneuil sur Marne - France